"Shield and Seal" Drain Coverä (Patent Pending)

21st Century Storm Drain Protection Technology SM

Shield and Seal Drain Coverä

- Covers drain completely (base fits over entire drain inlet)
- Seals liquid tight (impermeable foam rubber gasket conforms to and seals off the drain inlet as latching mechanism compresses gasket against surface around drain)
- Simple and quick installation (in less than a minute)
- Lightweight (weighs less than two pounds)
- Strong and sturdy (can support a 190 pound individual jumping up and down)
- Base flexes to conform to contour of surface around drain inlet

One Minute Installation Procedure

Step 1. Center the "Shield and Seal" Drain Cover™ over grate.

Step 2. Slide bottom end of threaded rod through pipe in the base and opening in the center portion of the grate.

Step 3. Turn handle approximately 90° and pull up to engage the bent portion of threaded rod with bottom of grate.

Step 4. Spin nut on lower portion of threaded rod in clockwise direction.

Step 5. Tighten down on nut until gasket makes good seal against surface around drain on all four sides.

Specifications

Shield

Base - 5/8 inch thick (dual twin wall polycarbonate) Gasket- 2 inch wide (resilient foam rubber)

Seal

Sealing Mechanism- 11-inch long, 3/8-inch diameter threaded rod, gasket covered sealing disk, nut and washer with 6-inch long handle

Total Weight less than 4 pounds

Available Sizes	Fits Drains up to	Price Plus S&H
20" X 20"	16" X 16"	\$165.00
28" Diameter	24" Circular	\$300.00
30" X 30"	24" X 24"	\$300.00
30" X 40"	24" X 36"	\$350.00
40" X 40"	36" X 36"	\$380.00
Other sizes available upon request.		


Purchase yours today by contacting:

cyoung@pollutionreduction.com


Pollution Reduction Services, Inc. 12 South First Street Suite 816 San Jose, CA 95113 (408) 937-8185 or (408) 595 1803



Shield and Seal Drain Coverä (Patent Pending)

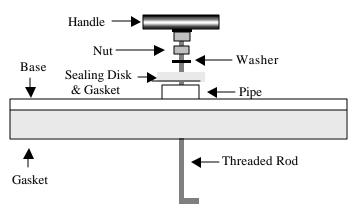

Side view of Shield and Seal Drain Cover

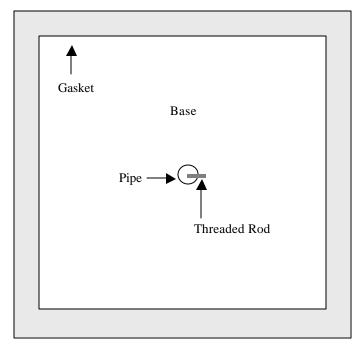

Underside View of Shield and Seal Drain Cover